POWER YOUR FUTURE Weichai Generator LG60WP

WP4.1D80E200

Prime Power: 64KW/80KVA Standby Power: 70.4KW/88KVA



Increased availability for new operations Reliable, robust and versatile generator. Ready to deliver power for a next job.

Increased uptime during operations Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer

transport and installation.

Reduced service & maintenance costs

Longer service intervals. Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.



Operate safely in accordance with proper operation manual.
To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.

WEICHAI Series 20KVA--600KVA



FUAN LONGKAI POWER CO.,LTD.

Headquarters:

Add: Wei 5 Road, Tiehu Industrial Zone, Fuan, Fujian,China Tel:+86-0593-6309773 Fax:+86-0593-6586988 E-mail: sales@longkaipower.com Web: www.longkaipower.com



Technical Data

Model		LG60WP
Rated prime power	kva	80
Rated standard power	kva	88
Rated voltage line to line	V	400/230
Rated current	А	115.5
Maximun sound level	dB(@7m)	96

Engi<u>ne-We</u>ichai

Model	WP4.1D80E200	
Aspiration	Irbocharged&No-Intercooling	
Fuel system	Mechanial pump	
No. cylinders		4 in line
Displacement	Liquid	4.1
Bore*Stroke	mm	105*118
Compression ratio		17.5:1
Rated speed	r/min	1500
Rated net power(with fan)	Kw	72
Governor type		Electronic speed
Start Motor	V	24

Exhause System		
Exhause gas flow	m³/min	340.6
Exhause gas temp	°C	560
Max back pressure	kPa	10
•		

Aspiration SystemMax inlet pressurekPa≤3Combustion volumem³/min/Air flowm³/min325

Fuel System		
100% load(Prime power)	L/h	17.5
75% load(Prime power)	L/h	/
50% load(Prime power)	L/h	/
Fuel tank capacity	L	150

Lubrication System		
Oil capacity	L	13
Oil consumption	g/kwh	0.4
Oil pressure	kPa	300-500
(continuous operation)		

Cooling SystemCoolant capacityL9.4Thermostat operation range°C76-89Max water temperature°C98

Alternator		
Model	LONGKAI	LK224F
	STAMFORD	UCI224F
Phase		3
Voltage	V	400/230
Wiring Type	3 Pha	ase 4 wire, Y type
Bearing		1
Power factor		0.8
Frequency	Hz	50
Prime power	KW	58
Exciter Type	Brushle	ss, self-excitation
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	≤1000
Controller-DEEPSEA		
Model		DSE6120MK3
Protective functions:		
Low oil pressure		
High water temperature		
High/low voltage		
High Engine Temperature	e and Overspee	ed.
Voltage regulator frequent	cy regulator	
Emergency stop		
Start failure		

Control Module Options

8.86
8,002
20 BH



Auto generator control module

Control module with" Three Remote Control" functions

- ATS auto load transfer screen
- Synchronising control modules
- Power output cabinet

LG60WP



Standard Features

Engine(WEICHAI GROUP)
Radiator 50°C max,fans are driven by bel
24V charge alternator
Alternator: single bearing alternator IP23,
insulation class H/H
Standard auto control system
One set of air filter, fuel filter, oil filter
Main line circuit breaker/MCCB
Base fuel tank
Two 24V batteries, rac and cable
Exhaust system(Ripple flex exhaust pipe,
exhaust siphon, flange, muffler
User manual

Options

Battery charge		0
Engine heater		\bigcirc
Alternator heater		\bigcirc
PMG		\bigcirc
Water oil separator		0
Daily fuel tank		\bigcirc
Remote control panel		\bigcirc
Automatic transfer switch/AT	S	\bigcirc
Switch box		0
Standard: •	Options: o	

Warranty*


Weichai Engine


12 months from date of purchase and 1000 hours.


Generator

12 months from date of purchase or 1000 hours (whichever occurs first).

Unit Dimensions(Basic unit)

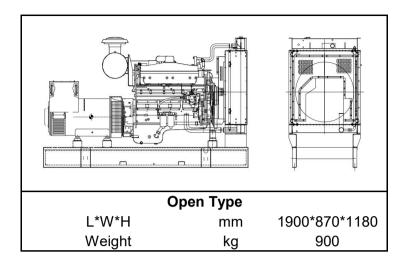

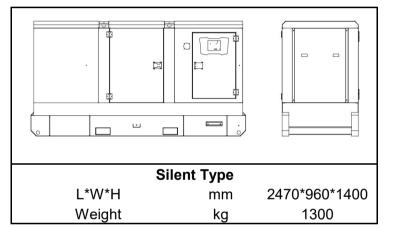

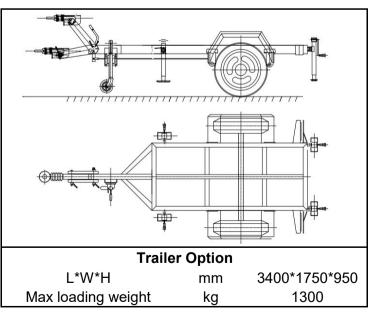



More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.